


Submitted Model No.: Specific Features:



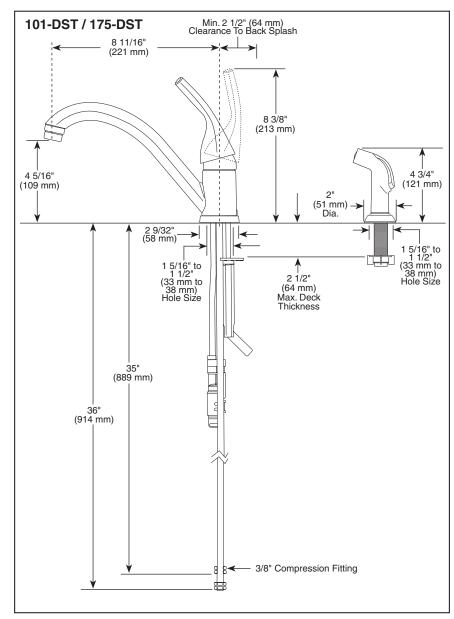

FAUCETS

- Single Handle Deck Mount
- 1 and 2 Hole Sink Applications
- DIAMOND Seal® Technology
- Integrated Supply Tubes

STANDARD SPECIFICATIONS:

- 8 11/16" (221 mm) long spout swings 180°.
- Lever handle shall return to neutral position when valve is turned off.
- Control mechanism shall be the diamond coated ceramic cartridge.
- Model 175 series with spray attachment has anti-siphon device as integral part of faucet.
- Vegetable sprayer hose installation on model 175 series.
- 3/8" O.D. straight, staggered pex supply tubes 35" (889 mm) and 36" (914 mm) long.
- Standard 3/8" (10 mm) compression gasket fittings.

WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.







COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1ASME A112.18.6

Indicates compliance to ICC/ANSI A117.1

 Verified compliant with .25% weighted average Pb content regulations.

