

Features

- Metal construction
- 4-1/4" (108 mm) spout reach
- Pop-up drain with lift rod and tailpiece
- Stationary spout
- Quarter-turn washerless ceramic disc valves
- Sculptured acrylic handles
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar)

Material

- Brass valve bodies
- KOHLER® finishes resist corrosion and tarnishing

Installation

- For 8" – 16" (203 – 406 mm) centers



DISCONTINUED This product has been discontinued.

Codes/Standards

ASME A112.18.1/CSA B125.1

NSF/ANSI/CAN 61

NSF/ANSI/CAN 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992


EPA WaterSense®

IAPMO Certification

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

DISCONTINUED been discontinued.

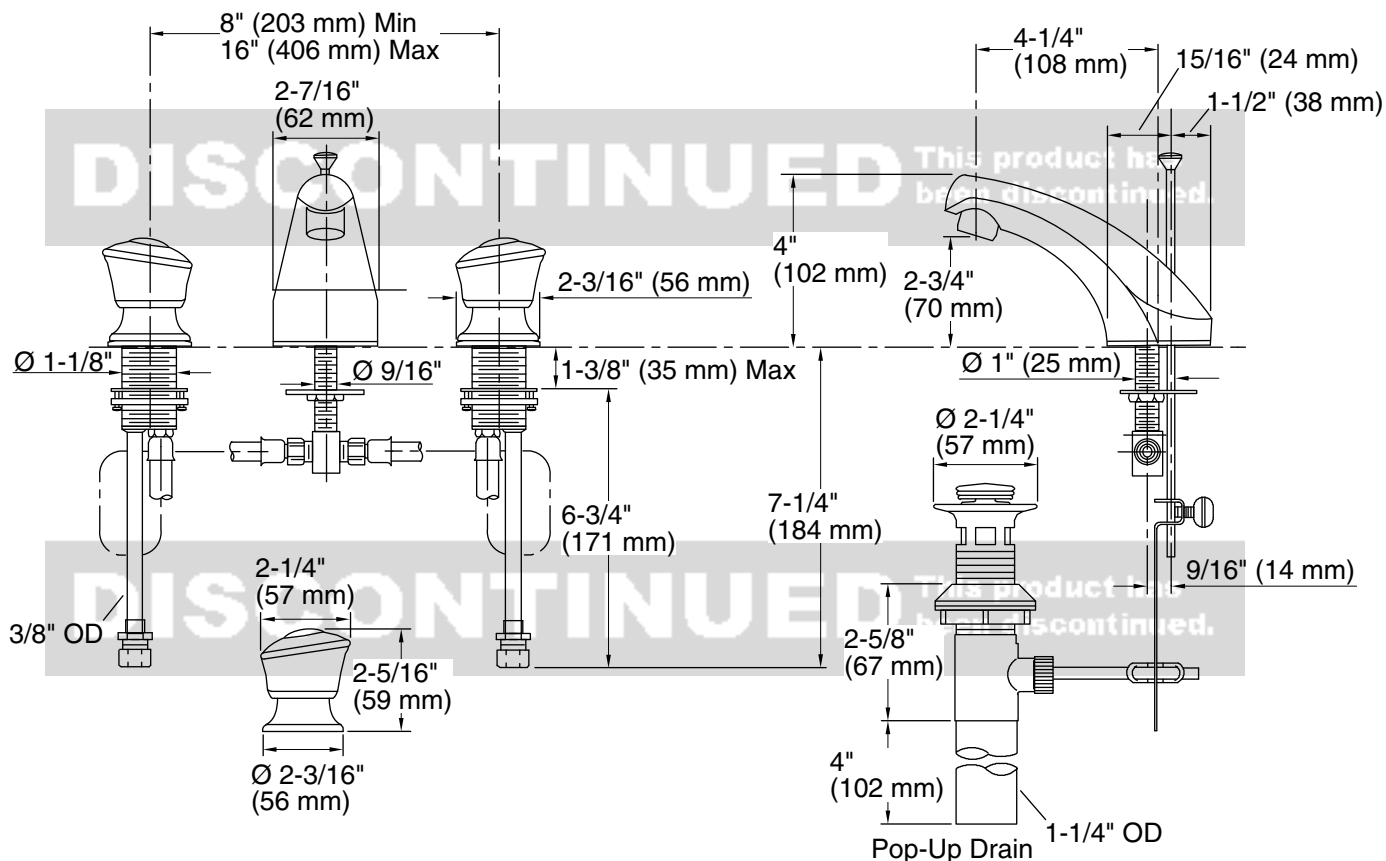

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 1.5 gal/min (5.7 l/min)

Pressure: 60 psi (4.1 bar)

Drain included: Yes

Spout:

Spout reach: 4-1/4" (108 mm)

Notes

Install this product according to the installation guide.